


REV	ECRN	DATE
1	NEW PRODUCTION	20221022

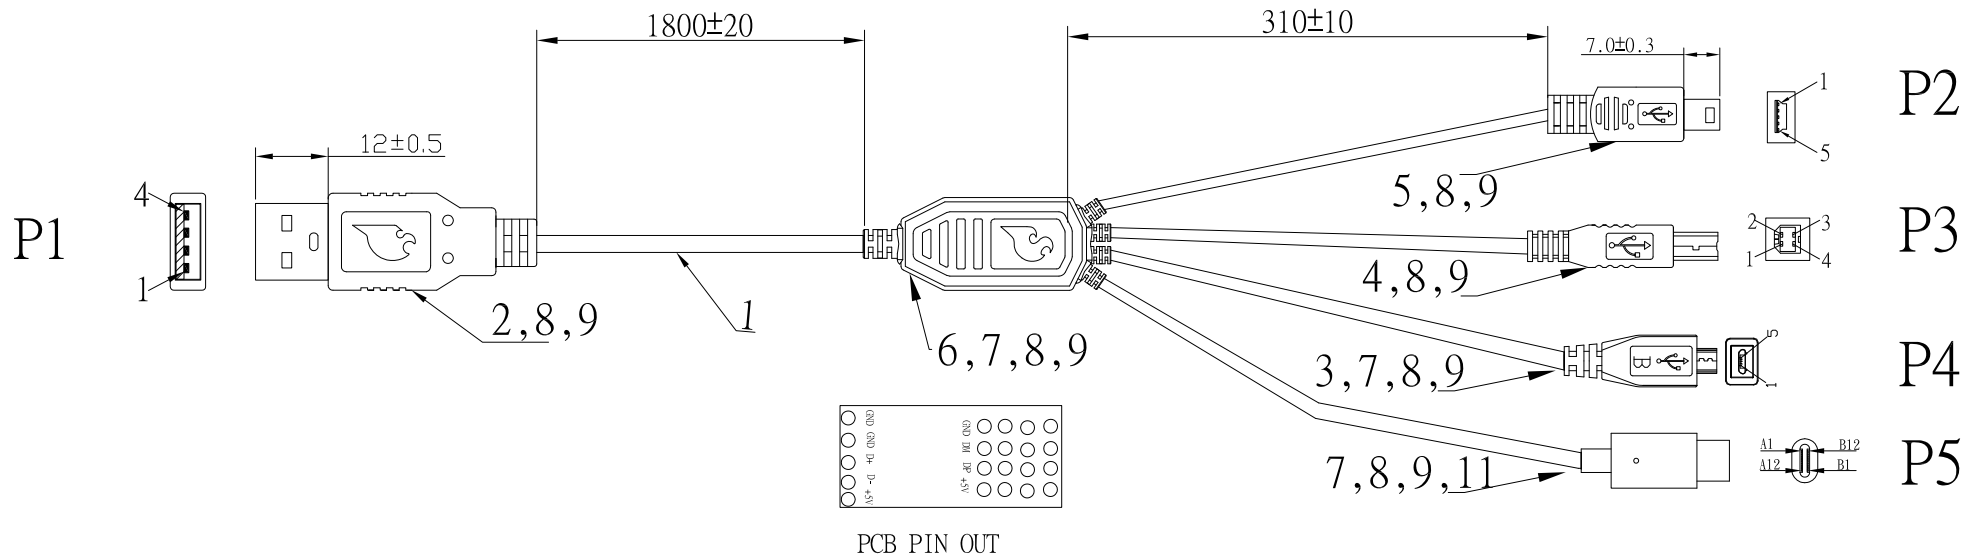

Mould Numbers: W-49 W-50 P-64 P-65 P-94 P-235-1 P-236-1

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MIS WIRE TEST.
2. CONTACT RESISTANCE: 2 ohm,
3. INSULATOR RESISTANCE: 5M ohm.
4. HIGH VOLTAGE: DC 300V 0.01sec.
5. MUST BE ROHS COMPLIANT.

接线表

P1	P2	P3	P4	P5
1(+5V) — RED	1(+5V) — RED	1 — RED	1 — RED	VBUS
2(D-) — WHITE	2(DM) — WHITE	2 — WHITE	2 — WHITE	A7
3(D+) — GREEN	3(DP) — GREEN	3 — GREEN	3 — GREEN	A6
4(GND) — BLACK	5(GND) — BLACK	4 — BLACK	5 — BLACK	GND
5(GND) — SHELL	SHELL — SHELL	SHELL — SHELL	SHELL — SHELL	SHELL

NO.	PART NO	ITEM	DESCRIPTION	Q' TY	UNIT
⑪	B.01012M.0N06R	CONNECTOR	USB TYPE-C M PIN GOLD PLATED SHELL PLATED NICKEL PLASTIC: BLACK	1	PCS
⑩	L.000000.0400R	TIE	L=100mm COLOR BLACK	1	PCS
⑨	J.000008.0500R	TIN WIRE	TIN WIRE OD: 0.8MM	8.5	G
⑧	C.060P03.0100R	MOLDING	PVC 60P RED	35.5	G
⑦	C.000000.0000R	MOLDING	PE	5.5	G
⑥	J.032014.0900R	PCB	USB ROOT HUB PCB L=32MM W=14.7MM	1	PCS
⑤	B.01004M.0N03R	CONNECTOR	USB B/M PIN GOLD PLATED SHELL NICKEL PLASTIC: WHITE	1	PCS
④	B.02005M.0N00R	CONNECTOR	MINI USB 5P PIN GOLD PLATED SHELL NICKEL PLASTIC: BLACK	1	PCS
③	B.03005M.0N00R	CONNECTOR	MICRO USB 5P PIN GOLD PLATED SHELL NICKEL PLASTIC: BLACK	1	PCS
②	B.01004M.0N01R	CONNECTOR	USB A/M 4P PIN GOLD PLATED SHELL NICKEL PLASTIC: WHITE	1	PCS
①	A.011X03.0400R	CABLE	UL2725 28AWG(7/0.12TC)*1P(WHITE, GREEN)+28AWG(7/0.12TC)*2C(RED, BLACK) AL+D(7/0.12TC)+B(32/0.10TCAAM) JACKET PVC 60P RED OD=4.0±0.1mm L=1850MM L=355MM	1	PCS

RoHS COMPLIANT		朋联电子有限公司 DongGuan PengLian Electronics Co.,Ltd TEL: 076938835098/38835095 FAX: 076938835091	
		比例: FREE	TITLE: USB A/M TO MINI 5P+MICRO+BM+TYPE-C
DRAWN BY		單位: mm	SUPPLIER'S ITEM: 9.00ACCA3698.000R
CHECKED BY			CUSTOMER: Spark Fun
APPROVED BY			CUSTOMER'S ITEM: 21050
		DRAWING NO. ACCA-3698	DATE 2022.10.22